

FORM PTO-1390 (Modified)
REV 11-2000

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

112740-374

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

10/019576

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/DE00/01542

16 May 2001 2020

23 June 1999

TITLE OF INVENTION

METHOD FOR CONTROLLING THE TRANSMISSION POWER IN A RADIO SYSTEM, AND A
CORRESPONDING RADIO SYSTEM

APPLICANT(S) FOR DO/EO/US

Bernhard Raaf

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☒ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

10/019576

PCT/DE00/01542

112740-374

24. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**\$890.00**Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	21 - 20 =	1	x \$18.00
Independent claims	2 - 3 =	0	x \$84.00

\$18.00**\$0.00**Multiple Dependent Claims (check if applicable). ☐**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$908.00**☐ Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.**\$0.00****SUBTOTAL =****\$908.00**Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).**\$0.00****TOTAL NATIONAL FEE =****\$908.00**Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐**\$0.00****TOTAL FEES ENCLOSED =****\$908.00**Amount to be:
refunded

\$

charged

\$

- a. ☒ A check in the amount of **\$908.00** to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **02-1818**. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

William E. Vaughan (Reg. No. 39,056)
 Bell, Boyd & Lloyd LLC
 P.O. Box 1135
 Chicago, Illinois 60690-1135

SIGNATURE

William E. Vaughan

NAME

39,056

REGISTRATION NUMBER

December 19, 2001

DATE

BOX PCT

IN THE UNITED STATES ELECTED/DESIGNATED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

PRELIMINARY AMENDMENT

APPLICANT: Bernhard Raaf . DOCKET NO: 112740-374
SERIAL NO: GROUP ART UNIT:
EXAMINER:

INTERNATIONAL APPLICATION NO: PCT/DE00/01542

10 INTERNATIONAL FILING DATE: 16 May 2001

INVENTION: METHOD FOR CONTROLLING THE TRANSMISSION
POWER IN A RADIO SYSTEM, AND A
CORRESPONDING RADIO SYSTEM

15 Assistant Commissioner for Patents,
Washington, D.C. 20231

Sir:

Please amend the above-identified International Application before entry
20 into the National stage before the U.S. Patent and Trademark Office under 35
U.S.C. §371 as follows:

In the Specification:

Please replace the Specification of the present application, including the
Abstract, with the following Substitute Specification:

25

SPECIFICATION

TITLE OF THE INVENTION

**METHOD FOR CONTROLLING THE TRANSMISSION POWER IN A RADIO
SYSTEM, AND A CORRESPONDING RADIO SYSTEM**

BACKGROUND OF THE INVENTION

30

Control of the transmission power represents an important performance
feature in mobile radio systems in order to suppress possible interference between
the individual connections and, thus, to make it possible to improve the capacity
and quality of the connections, in order to be able to reduce the mean transmission

power and to be able to match it as well as possible to the requirements, as well as to make it possible to compensate, at least partially, for losses in the transmission channels.

5 For this purpose, the signal transmitted by a transmitter is evaluated at the receiving end in the mobile radio system, in order to make it possible for this to produce information for power control and to transmit this to the transmitter, which then adjusts the transmission power in accordance with the power control or power adjustment information.

10 In this case, the power adjustment information is transmitted analogously to the transmission of the actual communication information, depending on the respective mobile radio system, embedded in a predetermined frame and timeslot structure; that is to say, the information is transmitted in a number of sequentially transmitted frames, with each frame having a specific number of timeslots. For known mobile radio systems, it has been proposed for the transmitter of the mobile
15 radio system to be operated in a mode which is referred to as the slotted mode or compressed mode, with the information to be transmitted in this case being transmitted within specific frames in compressed form to a receiver in order to make it possible, in the appropriate frame, to produce a section which is free of information bits, and which is referred to as an idle slot, which can then be used for
20 intermediate frequency measurements; for example, in order to prepare for a handover between different mobile radio systems. The information must be transmitted in a shorter time interval for compression.

The principle of compression is illustrated schematically in Figure 4, with a number of sequentially transmitted frames 3 being shown, each of which has an
25 identical frame duration; for example, 10 ms. The second frame 3 shown in Figure 4 uses the slotted mode, that is to say the information is transmitted in compressed form in this frame, so that an idle slot 9 occurs in which information is now transmitted. As is likewise shown in Figure 4, the transmission power can be increased during this frame 3 that is operated in the slotted mode in order to achieve
30 a transmission quality which is not adversely affected by the slotted mode.

However, the slotted mode interrupts the principle of fast power control. In modern mobile radio systems, power adjustment information for the transmitter is produced in each timeslot so that the transmission power can be adapted relatively quickly. However, no such power adjustment information can be transmitted during the idle slots described above. Firstly, this results in a higher error rate for the power adjustment information bits and, secondly, it must be expected that the instantaneous transmission power will deviate to a greater extent from the nominal value.

In order to overcome this problem associated with the slotted mode, it has been proposed, for example, to temporally increase the energy in what are referred to as pilot bits after the slotted mode, for power control, in order to allow correct decoding of the power adjustment information which is generally formed only by a corresponding bit with a specific mathematical sign. The pilot bits are used to estimate the channel impulse response during what is referred to as a training sequence, and they correspond to a known bit pattern. The power control procedure for the slotted mode as described in this document is, however, relatively complicated and requires a relatively large amount of effort.

The present invention is, thus, directed toward an improved method for controlling the transmission power in a radio system, and a corresponding radio system, in which case the aim is to reliably control the transmission power, particularly, in the slotted mode or compressed mode described above.

SUMMARY OF THE INVENTION

The present invention proposes that the same power adjustment information be transmitted in successive timeslots, so that the transmission power in the transmitter can be set with greater reliability, by evaluating the power adjustment information received during these timeslots in combination in order to adjust the transmission power.

The present invention is particularly suitable for use in what is referred to as the slotted mode, in which case the same power adjustment information is transmitted a number of times following an idle slot; that is to say, a section of a frame in which no information is transmitted. However, the present invention is

not restricted to this use in the slotted mode and can, in principle, be used also for timeslots which do not follow an idle slot in order to allow more reliable power control in these situations as well. In this case, this approach is of particular interest when the transmission conditions in the respective transmission channel are not changing rapidly (for example, when a mobile station is moving at slow speed).

In particular, the present invention proposes that the signal-to-noise ratio of the received signal be evaluated, for example, after an idle slot, that appropriate power adjustment information be produced as a function of this, and that this information be transmitted to the transmitter during the next two timeslots immediately following the idle slot. The transmitter then evaluates the power adjustment information received during these two timeslots and adjusts the transmission power taking account of both power adjustment information items so that a transmission power adjustment which may have been made on the basis of the first power adjustment information item can still be corrected.

The principle on which the present invention is based can be used both in the uplink, that is to say for transmitting communication information from a mobile station to a base station, and in the downlink, that is to say for the opposite direction, or else for both directions at the same time.

After receiving the power adjustment information in the first timeslot immediately following the idle slot, the transmission power initially can be kept constant so that no change is made until the power adjustment information in the second timeslot has been received.

Generally, the power adjustment information transmitted during each timeslot includes only one bit with the step width for changing the transmission power being coded digitally. However, instead of this, the step width also can be coded in analogue form; that is, the step width then depends, for example, directly analogously on the discrepancy between the received signal level measured in the receiver and a predetermined reference value.

The present invention requires no change whatsoever to the specified timeslot format. The combination of the successively transmitted power adjustment information items results in an improvement in the available bit-signal-noise ratio

(E_b/N_0). This increased bit-signal-noise ratio allows a greater step width to be provided for power control without any risk of an increased bit error rate more frequently resulting in the transmission power needing to be changed in the wrong direction.

5 The present invention can be used in various types of radio systems, although it is of particular interest for mobile radio systems using code division multiplexing methods (code division multiple access CDMA).

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Invention and
10 the Figures.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 shows an illustration to explain the principle on which the present invention is based, on the basis of a preferred exemplary embodiment.

Figure 2 shows a general schematic illustration to explain the information
15 transmission in a mobile radio system.

Figure 3 shows the frame and timeslot structure for what is referred to as a downlink connection, according to the present standard of UMTS Standardization.

Figure 4 shows an illustration to explain the frame structure in what is referred to as the slotted mode.

20 DETAILED DESCRIPTION OF THE INVENTION

The principle of power control will first of all be explained in more detail with reference to Figure 2. Figure 2 illustrates the communication between a base station 1 and a mobile station 2 in a mobile radio system. A connection from the base station 1 to the mobile part 2 is referred to as a downlink or forward link,
25 while a connection from the mobile part 2 to the base station 1 is referred to as an uplink or reverse link. For downlink power control, the respective received signal is evaluated in the mobile station 2, and power adjustment information or power control information is produced as a function of it, and is sent back to the base station 1 so that the base station 1 can set the transmission power as appropriate.

30 For uplink control, the received signal is evaluated in the base station 1, where the

power control information is produced, and the mobile station 2 is instructed to carry out power adaptation.

The power control information is, in this case, transmitted embedded in a predetermined frame structure depending on the respective mobile radio system.

5 As an example, Figure 3 shows the frame and timeslot structure for a downlink connection in a mobile radio system which is operated using a code division multiple access method (CDMA). The frame and timeslot structure shown in Figure 3 corresponds, in particular, to a UMTS mobile radio channel (Universal Mobile Telecommunications System), which is also referred to as a DPCH
10 (Dedicated Physical CHannel), in accordance with the current state of UMTS Standardization. UMTS is the designation for third-generation mobile radio systems, aiming to provide a worldwide, universal mobile radio standard. According to the UMTS mobile radio standard, the multiple access method is what is referred to as the WCDMA method (Wideband Code Division Multiple Access).

15 The frame structure shown in Figure 3 has a duration of 720 ms and includes, in particular, 72 identically constructed frames 3 with a frame duration of 10 ms, with each frame, in turn, having 16 timeslots 4, each with a timeslot duration of 0.625 ms. Alternatively, a frame 3 may also include 15 correspondingly longer timeslots 4. However, the former situation is assumed in the following text.
20 Each timeslot 4 includes information which is split between a logical control channel (DPCCH, Dedicated Physical Control Channel) and a logical data channel (DPDCH, Dedicated Physical Data Channel). The DPCCH section includes a pilot bit sequence 5 and what is referred to as TPC information (Transmitter Power Control) 6 and TFI information (Transmitter Format Identifier) 7. The DPDCH
25 section includes user data bits 8.

The pilot bit sequence 5 is used for estimating the channel impulse response during what is referred to as a training sequence, and corresponds to a known bit pattern. The receiver can determine or estimate the channel impulse response of the mobile radio channel by comparing the received signal with the known pilot bit
30 sequence.

The TFI information 7 is used for format identification for the respective receiver. The TFI bits are protected via their own coding method in accordance with the present WCDMA standard, and are distributed over an entire frame (time period 10 ms) by interleaving. If, for example, the TFI information 7 in each timeslot includes two bits, then this results in a total of $2 \cdot 16 = 32$ TFI bits per frame, which includes 16 timeslots, and these are coded via what is referred to as a biorthogonal coding method.

The TPC information 6 represents the command, produced by the receiver and transmitted to the transmitter, to adjust the transmission power. For this purpose, the received power or the signal-to-noise ratio of the received signal is compared with a predetermined reference value in the receiver, and the value for the power adjustment command is determined as a function of the discrepancy. As such, if the received power exceeds the reference value, a command is produced to reduce the transmission power, while a command to increase the transmission power is produced if the received power is less than the predetermined reference value. Thus, depending on the comparison result, the receiver transmits a digital or binary adjustment command to the transmitter. In this case, a command to increase the transmission power (power up command) is coded by a 1, while a command to reduce the transmission power (power down command) is coded by a zero. In each case, the adjustment command is transmitted to the transmitter after appropriate modulation. In accordance with the currently discussed WCDMA Standard for UMTS mobile radio systems, the transmission is carried out via QPSK modulation (Quadrature Phase Shift Keying), as a result of which the binary 1 or 0, respectively, is mapped onto the value -1 or +1, respectively, with subsequent spreading of the power control signal.

The power adjustment or power control information, thus, generally includes only one bit, which indicates whether the transmission power should be increased or decreased at the transmission end. In order to allow this bit to be transmitted with a sufficiently low error probability, the bit is transmitted repeatedly within the TPC field 6. The TPC information shown in Figure 3, in

consequence, includes, for example, the three bits which are transmitted successively with identical information content.

However, despite the repeated transmission of the TPC bits within the TPC field 6, the error rate is increased by the previously described slotted mode or compressed mode. In order to counteract this, information 6 is to be transmitted repeatedly, with this being done especially during the two timeslots 4 which immediately follow the idle slot 9.

In order to explain this principle, Figure 1 shows, by way of example, the structure of the already previously mentioned DPCCCH control channel (see Figure 3) in a frame, assuming that the timeslots #n shown in Figure 1, is the timeslot immediately following is an idle slot; that is to say, a section which is not filled with information. The profile of the transmission power, which is set in the transmitter as a function of the respectively transmitted TPC information, is shown underneath the timeslot structure.

In the receiver, the signal-to-noise ratio of the signal being received from the transmitter at that time is measured in order to determine the TPC or power adjustment information to be transmitted during the timeslot #n is compared with a reference value and is used to produce the TPC information TPC_n . This TPC information is transmitted to the transmitter during the timeslot #n where it is decoded and used to adjust the transmission power. In this case, it is possible to wait first of all in the transmitter for reception of the TPC information TPC_{n+1} transmitted during the next timeslot #n+1, before finally setting the transmission power to the desired value, so that it is recommended that the transmission power initially be set in the transmitter in accordance with a "normal" nominal step width which corresponds to a normal E_b/N_0 ratio after receiving the TPC information TPC_n . This step width is indicated by ΔP_n in Figure 1, and corresponds to the difference between the instantaneous transmission power P_{n-1} and the transmission power P_n set after reception of the TPC information TPC_n . The value 0 may also be chosen as the step width ΔP_n after reception of the power adjustment information TPC_n in order to keep the transmission power constant until the power adjustment

information TPC_{n+1} is received, since it is then possible to make a decision on the transmission power to be set with greater reliability.

In order to produce the TPC information to be transmitted during the next timeslot $\#n+1$, the TPC information from the previous timeslot is simply repeated, that is to say $TPC_{n+1} = TPC_n$, rather than evaluating the signal-to-noise ratio of the transmission signal once again. In this way, the ratio E_b/N_0 can be increased since, after receiving the timeslot $\#n+1$, the TPC information TPC_{n+1} can be combined with the already previously received TPC information TPC_n , and the transmitter is thus able to set the transmission power to the desired value with greater reliability.

If, for example, the transmitter identifies the fact that the decision made as a consequence of the most recently received TPC information was incorrect, this can now be corrected. As shown in Figure 1, the transmitter can now also change the transmission power with a larger step width, thus reducing the risk of a further deterioration being caused after an incorrect TPC decision. This is indicated in Figure 1 by ΔP_{n+1} , with both ΔP_n and ΔP_{n+1} indicating the step width with respect to the transmission power P_{n-1} set after the idle slot.

The principle, mentioned above, of repeated transmission of the same TPC information during successive timeslots can be applied not only to the first time after an interruption in the power control by the idle slot, but also during a normal connection. In this case, this is of particular interest for those situations in which the transmission channel does not change so fast with time, since the disadvantage, associated with the method, of an increased delay in the power control can then be more than compensated for by the advantage of better quality of the transmitted power adjustment information. Since the smallest step width for power control is currently 1 dB and, for implementation reasons, smaller values are not suitable for use in mobile stations, this provides a possible way to reduce the power control rate.

Furthermore, the present invention can be used to transmit the power adjustment information with a smaller number of TPC bits. Although this reduces the bit-signal-noise ratio (E_b/N_0), this can be compensated for by increased transmission reliability. The use of a small number of TPC bits is advantageous to

the extent that this reduces what is referred to as the overhead, and the efficiency can thus be improved.

Furthermore, the present invention also can be used for what is referred to as a soft handover. In this case, the mobile station 2 transmits and receives data from and to a number of base stations 1. To detect the user data, the received signals from all the connections are combined, thus allowing the power of each individual connection to be reduced. The TPC power adjustment commands may, however, in general not be combined since the TPC power adjustment commands sent from different base stations 1 (via a downlink) need not be identical. Since the TPC power adjustment commands also must be evaluated very quickly, it is also generally impossible to combine them in the uplink. Otherwise, intolerable delays would occur caused by the corresponding information being passed on from one base station 1 to another base station 1. In addition to increasing the power level of the number of TPC bits, this could be overcome by use of the present invention.

Finally, the previously described invention can also be combined with the principle of analogue transmission of the step width for adjustment of the transmission power. In this case, the transmission power to be set in the transmitter and the corresponding step width are coded in analogue form rather than digitally. That is, the power adjustment information is in each case set in analogue form depending on the discrepancy between the measured received signal level and the predetermined reference value; for example, the pilot bit reception level. A discrepancy that is twice as great between the received signal level and the reference value thus results in a step width which is twice as large.

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

ABSTRACT OF THE DISCLOSURE

In a radio system, the transmission power is controlled by a receiver evaluating the signal from a transmitter and a determining power adjustment information as a function of this, and sending this information to the transmitter during successive timeslots, in order to control the transmission power. In what is referred to as the slotted mode, the same power adjustment information is transmitted to the transmitter in a number of successive timeslots following a section which is not filled with information.

In the Claims:

On page 13, cancel line 1 and substitute the following left-hand justified heading therefore:

CLAIMS

5 Please cancel the claims 1-21, without prejudice, and substitute the following claims therefore:

22. A method for controlling transmission power in a radio system, the method comprising the steps of:

10 transmitting information, embedded in a frame and a time slot structure, between a transmitter and a receiver;

 evaluating a signal, which is received by the receiver from the transmitter via a transmission channel in the radio system;

15 producing power adjustment information as a function of the evaluated signal in each time slot and sending the power adjustment information to the transmitter;

 adjusting the transmission power in the transmitter as a function of the power adjustment information; and

20 transmitting identical power adjustment information from the receiver to the transmitter in a plurality of successive timeslots.

23. A method for controlling transmission power in a radio system as claimed in claim 22, wherein the information is transmitted in compressed form in a specific frame such that a section of the frame is not filled with information and,
25 following the section which is not filled with information, the receiver transmits identical power adjustment information to the transmitter in a plurality of successive timeslots.

24. A method for controlling transmission power in a radio system as
30 claimed in claim 23, wherein, following the section which is not filled with

information, the receiver transmits identical power adjustment information to the transmitter in two successive first and second timeslots.

25. A method for controlling transmission power in a radio system as
5 claimed in claim 24, wherein the transmission power in the transmitter is adjusted as a function of both power adjustment information received in the first timeslot following the section which is not filled with information and power adjustment information received in a second section following the section which is not filled with information.

10

26. A method for controlling transmission power in a radio system as
claimed in claim 24, wherein the signal received by the receiver from the transmitter is evaluated once again only after the transmission of the identical power adjustment information in the first and second time slots following the
15 section which is not filled with information, and new power adjustment information is produced as a function of the re-evaluated signal and is sent to the transmitter in a next timeslot.

27. A method for controlling transmission power in a radio system as
20 claimed in claim 24, wherein the transmission power in the transmitter is adjusted by a fixed amount after receiving the power adjustment information transmitted in the first timeslot following the section which is not filled with information, and after receiving the power adjustment information transmitted during the second timeslot following the section which is not filled with information, and taking
25 account of the power adjustment information transmitted during the first time slot following the section which is not filled with information, a power change value is determined, and the transmission power in the transmitter is adjusted in accordance with the power change value relative to the transmission power set prior to the first adjustment.

30

28. A method for controlling transmission power in a radio system as claimed in claim 27, wherein the fixed amount corresponds to a value of zero.

29. A method for controlling transmission power in a radio system as claimed in claim 22, wherein, in the receiver, the power adjustment information is produced analogously as a function of a discrepancy between a specific evaluated parameter in the received signal and a corresponding reference value.

30. A method for controlling transmission power in a radio system as claimed in claim 23, wherein identical power adjustment information is transmitted to the transmitter in a plurality of successive timeslots which do not immediately follow the section which is not filled with information, and the transmission power in the transmitter is adjusted taking account of the power adjustment information received during the plurality of successive timeslots.

31. A method for controlling transmission power in a radio system as claimed in claim 23, wherein identical power adjustment information is transmitted to the transmitter a plurality of times in successive timeslots following the section which is not filled with information, with a plurality of repetitions being different each time.

32. A method for controlling transmission power in a radio system as claimed in claim 22, wherein the method is used during a soft handover in the mobile radio system.

33. A radio system, comprising:
a transmitter; and
a receiver for receiving a signal, which is transmitted from the transmitter via a transmission channel in the radio system, and for evaluating the received signal in order to produce power adjustment information as a function of

the received signal, and to send the power adjustment information to the transmitter;

wherein the transmitter adjusts the transmission power as a function of the power adjustment information received from the receiver, with information
5 being transmitted, embedded in a frame and a timeslot structure, between the transmitter and the receiver with a signal, the receiver transmitting identical power adjustment information to the transmitter in a plurality of successive time slots.

34. A radio system as claimed in claim 33, wherein the information is
10 transmitted in compressed form in a specific frame, such that there is a section of the frame which is not filled with information, the receiver transmitting identical power information to the transmitter in a plurality of successive time slots following the section which is not filled with information.

35. A radio system as claimed in claimed 34, wherein the receiver
15 transmits identical power adjustment information to the transmitter to the transmitter in two successive first and second timeslots following the section which is not filled with information.

36. A radio system as claimed in claimed 35, wherein the transmitter
20 adjusts the transmission power as a function of both power adjustment information received in the first time slot following the section which is not filled with information and power adjustment information received in a second section following the section which is not filled with information.

37. A radio system as claimed in claimed 35, wherein the receiver once
25 again evaluates the signal, received by the receiver from the transmitter after the transmission of the identical power adjustment information in the first and second time slots following the section which is not filled with information, and produces
30 new power adjustment information as a function of the re-evaluated signal, and sends the new power adjustment information to the transmitter in a next timeslot.

38. A radio system as claimed in claim 35, wherein the transmitter changes the transmission power by a fixed amount after receiving the power adjustment information transmitted in the first timeslot following the section which is not filled with information and, after receiving the power adjustment information received during the second timeslot following the section which is not filled with information and additionally taking account of the power adjustment information received during the first timeslot following the section which is not filled with information, determines a power change and changes the transmission power in the transmitter in accordance with the power change value.

39. A radio system as claimed in claim 38, wherein the fixed amount corresponds to a value of zero such that after receiving the power adjustment information transmitted in the first timeslot following the section which is not filled with information, the transmitter keeps the transmission power constant until reception of the power adjustment information transmitted in the second timeslot following the section which is not filled with information.

40. A radio system as claimed in claim 33, wherein the receiver produces the power adjustment information analogously as a function of a discrepancy between a specific evaluated parameter in the received signal and a corresponding reference value.

41. A radio system as claimed in claim 34, wherein the receiver also transmits identical power adjustment information to the transmitter in a plurality of successive timeslots which do not directly follow a section which is not filled with information, and the transmitter adjusts the transmission power taking account of the power adjustment information received during the plurality of successive timeslots.

42. A radio system as claimed in claim 33, wherein the radio system is a CDMA mobile radio system.

REMARKS


5 The present amendment makes editorial changes and corrects typographical errors in the specification, which includes the Abstract, in order to conform the specification to the requirements of United States Patent Practice. No new matter is added thereby.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned
10 **"Versions with Markings to Show Changes Made."**

In addition, the present amendment cancels original claims 1-21 in favor of new claims 22-42. Claims 22-42 have been presented solely because the revisions by crossing out underlining which would have been necessary in claims 1-21 in order to present those claims in accordance with preferred United States Patent
15 Practice would have been too extensive, and thus would have been too burdensome. The present amendment is intended for clarification purposes only and not for substantial reasons related to patentability pursuant to 35 U.S.C. §§101, 102, 103 or 112. Indeed, the cancellation of claims 1-21 does not constitute an intent on the part of the Applicants to surrender any of the subject matter of claims 1-21.

20 Early consideration on the merits is respectfully requested.

Respectfully submitted,
BELL, BOYD & LLOYD LLC

25 BY 
William E. Vaughan
Reg. No. 39,056
P.O. Box 1135
Chicago, Illinois 60690-1135
Phone: (312) 807-4292

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Specification:

SPECIFICATION

TITLE OF THE INVENTION

5 METHOD FOR CONTROLLING THE TRANSMISSION POWER IN A RADIO
 SYSTEM, AND A CORRESPONDING RADIO SYSTEM

Description

~~Method for controlling the transmission power in a radio system, and a~~
~~corresponding radio system~~

10 ~~The present invention relates to a method as claimed in the~~
~~precharacterizing clause of claim 1 for controlling the transmission power in a radio~~
~~system, and to a corresponding radio system as claimed in the precharacterizing~~
~~clause of claim 12, in particular to a corresponding mobile radio system.~~

BACKGROUND OF THE INVENTION

15 Control of the transmission power represents an important performance
feature in mobile radio systems, in order to suppress possible interference between
the individual connections, and, thus, to make it possible to improve the capacity
and quality of the connections, in order to be able to reduce the mean transmission
power and to be able to match it as well as possible to the requirements, as well as
20 to make it possible to compensate, at least partially, for losses in the transmission
channels.

For this purpose, the signal transmitted by a transmitter is evaluated at the
receiving end in the mobile radio system, in order to make it possible to for this to
produce information for power control and to transmit this to the transmitter, which
25 then adjusts the transmission power in accordance with the power control or power
adjustment information.

In this case, the power adjustment information is transmitted analogously to
the transmission of the actual communication information, depending on the
respective mobile radio system, embedded in a predetermined frame and timeslot
30 structure; that is to say, the information is transmitted in a number of sequentially
transmitted frames, with each frame having a specific number of timeslots. For

known mobile radio systems, it has been proposed for the transmitter of the mobile radio system to be operated in a mode which is referred to as the slotted mode or compressed mode, with the information to be transmitted in this case being transmitted within specific frames in compressed form to a receiver in order to
5 make it possible, in the appropriate frame, to produce a section which is free of information bits, and which is referred to as an idle slot, which can then be used for intermediate frequency measurements; for example, in order to prepare for a handover between different mobile radio systems. The information must be transmitted in a shorter time interval; for compression.

10 The principle of compression is illustrated schematically in Figure 4, with a number of sequentially transmitted frames 3 being shown, each of which has an identical frame duration; for example, 10 ms. The second frame 3 shown in Figure 4 uses the slotted mode, that is to say the information is transmitted in compressed form in this frame, so that an idle slot 9 occurs; in which ~~now~~ information is now
15 transmitted. As is likewise shown in Figure 4, the transmission power can be increased during this frame 3 that is operated in the slotted mode; in order to achieve a transmission quality which is not adversely affected by the slotted mode.

However, the slotted mode interrupts the principle of fast power control. In modern mobile radio systems, power adjustment information for the transmitter is
20 produced in each timeslot; so that the transmission power can be adapted relatively quickly. However, no such power adjustment information can be transmitted during the idle slots described above. Firstly, this results in a higher error rate for the power adjustment information bits and, secondly, it must be expected that the instantaneous transmission power will deviate to a greater extent from the nominal
25 value.

In order to overcome this problem associated with the slotted mode, it has been proposed, for example, to temporally increase the energy in what are referred to as pilot bits after the slotted mode, for power control, in order to allow correct decoding of the power adjustment information; which is generally formed only by a
30 corresponding bit with a specific mathematical sign. The pilot bits are used to estimate the channel impulse response during what is referred to as a training

sequence, and they correspond to a known bit pattern. The power control procedure for the slotted mode as described in this document is, however, relatively complicated, and requires a relatively large amount of effort.

5 The present invention is, thus ~~based on the object of proposing, directed~~
toward an improved method for controlling the transmission power in a radio system, and ~~of proposing~~ a corresponding radio system, in which case the aim is to reliably control the transmission power ~~in particular even, particularly,~~ in the slotted mode or compressed mode described above.

10 ~~According to the invention, this object is achieved by a method having the features of claim 1, and by a radio system having the features of claim 12. The depending claims each define preferred embodiments of the present invention.~~

SUMMARY OF THE INVENTION

15 The present invention proposes that the same power adjustment information be transmitted in successive timeslots, so that the transmission power in the transmitter can be set with greater reliability, by evaluating the power adjustment information received during these timeslots in combination in order to adjust the transmission power.

20 The present invention is particularly suitable for use in what is referred to as the slotted mode, in which case the same power adjustment information is transmitted a number of times following an idle slot_i; that is to say, a section of a frame in which no information is transmitted. However, the present invention is not restricted to this use in the slotted mode, ~~that is to say the invention~~ and can, in principle, ~~also~~ be used also for timeslots which do not follow an idle slot_i in order to allow more reliable power control in these situations as well. In this case, this
25 approach is of particular interest when the transmission conditions in the respective transmission channel are not changing rapidly (for example, when a mobile station is moving at slow speed).

30 In particular, the present invention proposes that the signal-to-noise ratio of the received signal be evaluated, for example, after an idle slot, that appropriate power adjustment information be produced as a function of this, and that this information be transmitted to the transmitter during the next two timeslots

immediately following the idle slot. The transmitter then evaluates the power adjustment information received during these two timeslots and adjusts the transmission power taking account of both power adjustment information items; so that a transmission power adjustment which may have been made on the basis of
5 the first power adjustment information item can still be corrected.

The principle on which the present invention is based can be used both in the uplink, that is to say for transmitting communication information from a mobile station to a base station, and in the downlink, that is to say for the opposite direction, or else for both directions at the same time.

10 After receiving the power adjustment information in the first timeslot immediately following the idle slot, the transmission power ~~can~~ initially can be kept constant; so that no change is made until the power adjustment information in the second timeslot has been received.

Generally, the power adjustment information transmitted during each
15 timeslot ~~comprises~~ includes only one bit; with the step width for changing the transmission power being coded digitally. However, instead of this, the step width ~~can~~ also can be coded in analogue form; that is, ~~to say~~ the step width then depends, for example, directly analogously on the discrepancy between the received signal level measured in the receiver and a predetermined reference value.

20 The present invention requires no change whatsoever to the specified timeslot format. The combination of the successively transmitted power adjustment information items results in an improvement in the available bit-signal-noise ratio (E_b/N_0). This increased bit-signal-noise ratio allows a greater step width to be provided for power control without any risk of an increased bit error rate more
25 frequently resulting in the transmission power needing to be changed in the wrong direction.

The present invention can be used in various types of radio ~~system~~; systems, although ~~the present invention~~ it is of particular interest for mobile radio systems using code division multiplexing methods (code division multiple access CDMA).

30 ~~The invention will be explained in more detail in the following text with reference to the drawing, based on preferred exemplary embodiments.~~

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Invention and the Figures.

BRIEF DESCRIPTION OF THE FIGURES

5 Figure 1 shows an illustration to explain the principle on which the present invention is based, on the basis of a preferred exemplary embodiment.

 Figure 2 shows a general schematic illustration to explain the information transmission in a mobile radio system.

10 Figure 3 shows the frame and timeslot structure for what is referred to as a downlink connection, according to the present standard of UMTS Standardization, and.

 Figure 4 shows an illustration to explain the frame structure in what is referred to as the slotted mode.

DETAILED DESCRIPTION OF THE INVENTION

15 The principle of power control will first of all be explained in more detail with reference to Figure 2, with Figure 2 ~~illustrating~~ illustrates the communication between a base station 1 and a mobile station 2 in a mobile radio system. A connection from the base station 1 to the mobile part 2 is referred to as a downlink or forward link, while a connection from the mobile part 2 to the base station 1 is referred to as an uplink or reverse link. For downlink power control, the respective
20 received signal is evaluated in the mobile station 2, and power adjustment information or power control information is produced as a function of it, and is sent back to the base station 1; so that the base station 1 can set the transmission power as appropriate. For uplink control, the received signal is evaluated in the base
25 station 1, where the power control information is produced, and the mobile station 2 is instructed to carry out power adaptation.

 The power control information is, in this case, transmitted embedded in a predetermined frame structure, depending on the respective mobile radio system.

30 As an example, Figure 3 shows the frame and timeslot structure for a downlink connection in a mobile radio system which is operated using a code division multiple access method (CDMA). The frame and timeslot structure shown

in Figure 3 corresponds, in particular, to a UMTS mobile radio channel (Universal Mobile Telecommunications System), which is also referred to as a DPCH (Dedicated Physical CHannel), in accordance with the current state of UMTS Standardization. UMTS is the designation for third-generation mobile radio systems, aiming to provide a worldwide, universal mobile radio standard. According to the UMTS mobile radio standard, the multiple access method is what is referred to as the WCDMA method (Wideband Code Division Multiple Access).

The frame structure shown in Figure 3 has a duration of 720 ms and ~~comprises~~ includes, in particular, 72 identically constructed frames 3 with a frame duration of 10 ms, with each frame, in turn, having 16 timeslots 4, each with a timeslot duration of 0.625 ms. Alternatively, a frame 3 may also ~~comprise~~ include 15 correspondingly longer timeslots 4. However, the former situation is assumed in the following text. Each timeslot 4 ~~comprises~~ includes information which is split between a logical control channel (DPCCH, Dedicated Physical Control Channel) and a logical data channel (DPDCH, Dedicated Physical Data Channel). The DPCCH section ~~comprises~~ includes a pilot bit sequence 5 and what is referred to as as TPC information (Transmitter Power Control) 6 and TFI information (Transmitter Format Identifier) 7. The DPDCH section ~~comprises~~ includes user data bits 8.

The pilot bit sequence 5 is used for estimating the channel impulse response during what is referred to as a training sequence, and corresponds to a known bit pattern. The receiver can determine or estimate the channel impulse response of the mobile radio channel by comparing the received signal with the known pilot bit sequence.

The TFI information 7 is used for format identification for the respective receiver. The TFI bits are protected ~~by means of~~ via their own coding method in accordance with the present WCDMA standard, and are distributed over an entire frame (time period 10 ms) by interleaving. If, for example, the TFI information 7 in each timeslot ~~comprises~~ includes two bits, then this results in a total of $2 \cdot 16 = 32$ TFI bits per frame, which ~~comprises~~ includes 16 timeslots, and these are coded ~~by means of~~ via what is referred to as a biorthogonal coding method.

The TPC information 6 represents the command, produced by the receiver and transmitted to the transmitter, to adjust the transmission power. For this purpose, the received power or the signal-to-noise ratio of the received signal is compared with a predetermined reference value in the receiver, and the value for the power adjustment command is determined as a function of the discrepancy. This means that As such, if the received power exceeds the reference value, a command is produced to reduce the transmission power, while a command to increase the transmission power is produced if the received power is less than the predetermined reference value. Thus, depending on the comparison result, the receiver ~~thus~~ transmits a digital or binary adjustment command to the transmitter. In this case, a command to increase the transmission power (power up command) is coded by a 1, while a command to reduce the transmission power (power down command) is coded by a zero. In each case, the adjustment command is transmitted to the transmitter after appropriate modulation. In accordance with the currently discussed WDCMA Standard for UMTS mobile radio systems, the transmission is carried out ~~by means of~~ via QPSK modulation (Quadrature Phase Shift Keying), as a result of which the binary 1 or 0, respectively, is mapped onto the value -1 or +1, respectively, with subsequent spreading of the power control signal.

The power adjustment or power control information, thus, generally ~~comprises~~ includes only one bit, which indicates whether the transmission power should be increased or decreased at the transmission end. In order to allow this bit to be transmitted with a sufficiently low error probability, the bit is transmitted repeatedly within the TPC field 6. The TPC information shown in Figure 3, in consequence, ~~comprises~~ includes, for example, the three bits which are transmitted successively with identical information content.

However, despite the repeated transmission of the TPC bits within the TPC field 6, the error rate is increased by the previously described slotted mode or compressed mode. In order to counteract this, ~~before~~ ~~[lacuna]~~ information 6 is to be transmitted repeatedly, with this being done especially during the two timeslots 4 which immediately follow the idle slot 9.

In order to explain this principle, Figure 1 shows, by way of example, the structure of the already previously mentioned DPCCH control channel (see Figure 3) in a frame, assuming that the timeslots #n shown in Figure 1, is the timeslot immediately following is an idle slot; that is to say, a section which is not filled with information. The profile of the transmission power, which is set in the transmitter as a function of the respectively transmitted TPC information, is shown underneath the timeslot structure.

In the receiver, the signal-to-noise ratio of the signal being received from the transmitter at that time is measured in order to determine the TPC or power adjustment information to be transmitted during the timeslot #n, is compared with a reference value and is used to produce the TPC information TPC_n . This TPC information is transmitted to the transmitter during the timeslot #n, where it is decoded and used to adjust the transmission power. In this case, it is possible to wait first of all in the transmitter for reception of the TPC information TPC_{n+1} transmitted during the next timeslot #n+1, before finally setting the transmission power to the desired value, so that it is recommended that the transmission power initially be set in the transmitter in accordance with a "normal" nominal step width, which corresponds to a normal E_b/N_0 ratio, after receiving the TPC information TPC_n . This step width is indicated by ΔP_n in Figure 1, and corresponds to the difference between the instantaneous transmission power P_{n-1} and the transmission power P_n set after reception of the TPC information TPC_n . The value 0 may also be chosen as the step width ΔP_n after reception of the power adjustment information TPC_n , in order to keep the transmission power constant until the power adjustment information TPC_{n+1} is received, since it is then possible to make a decision on the transmission power to be set, with greater reliability.

In order to produce the TPC information to be transmitted during the next timeslot #n+1, the TPC information from the previous timeslot is simply repeated, that is to say $TPC_{n+1} = TPC_n$, rather than evaluating the signal-to-noise ratio of the transmission signal once again. In this way, the ratio E_b/N_0 can be increased since, after receiving the timeslot #n+1, the TPC information TPC_{n+1} can be combined with the already previously received TPC information TPC_n , and the transmitter is

thus able to set the transmission power to the desired value with greater reliability. If, for example, the transmitter identifies the fact that the decision made as a consequence of the most recently received TPC information was incorrect, this can now be corrected. As shown in Figure 1, the transmitter can now also change the transmission power with a larger step width, thus reducing the risk of a further deterioration being caused after an incorrect TPC decision. This is indicated in Figure 1 by ΔP_{n+1} , with both ΔP_n and ΔP_{n+1} indicating the step width with respect to the transmission power P_{n-1} set after the idle slot.

The principle, mentioned above, of repeated transmission of the same TPC information during successive timeslots can be applied not only to the first time after an interruption in the power control by the idle slot, but also during a normal connection. In this case, this is of particular interest for those situations in which the transmission channel does not change so fast with time, since the disadvantage, associated with the method, of an increased delay in the power control can then be more than compensated for by the advantage of better quality of the transmitted power adjustment information. Since the smallest step width for power control is currently 1 dB and, for implementation reasons, smaller values are not suitable for use in mobile stations, this provides a possible way to reduce the power control rate.

Furthermore, the present invention can be used to transmit the power adjustment information with a smaller number of TPC bits. Although this reduces the bit-signal-noise ratio (E_b/N_0), this can be compensated for, ~~however, by the advantage of the invention, namely~~ by increased transmission reliability. The use of a small number of TPC bits is advantageous to the extent that this reduces what is referred to as the overhead, and the efficiency can thus be improved.

Furthermore, the present invention ~~can~~ can also advantageously can be used for what is referred to as a soft handover. In this case, the mobile station 2 transmits and receives data from and to a number of base stations 1. To detect the user data, the received signals from all the connections are combined, thus allowing the power of each individual connection to be reduced. The TPC power adjustment commands may, however, in general not be combined; since the TPC power

adjustment commands sent from different base stations 1 (via a downlink) need not be identical. Since the TPC power adjustment commands ~~must~~ also must be evaluated very quickly, it is also generally impossible to combine them in the uplink. Otherwise, intolerable delays would occur, caused by the corresponding
5 information being passed on from one base station 1 to another base station 1. In addition to increasing the power level of the number of TPC bits, this could be overcome by use of the present invention.

Finally, the previously described invention can also be combined with the principle of analogue transmission of the step width for adjustment of the
10 transmission power. In this case, the transmission power to be set in the transmitter and the corresponding step width are coded in analogue form rather than digitally; ~~that is to say.~~ That is, the power adjustment information is in each case set in analogue form depending on the discrepancy between the measured received signal level and the predetermined reference value; for example, the pilot bit reception
15 level. A discrepancy that is twice as great between the received signal level and the reference value thus results in a step width which is twice as large.

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in
20 the hereafter appended claims.

ABSTRACT OF THE DISCLOSURE

Abstract

~~Method for controlling the transmission power in a radio system, and a~~
5 ~~corresponding radio system~~

In a radio system, the transmission power is controlled by a receiver (1; 2) evaluating the signal from a transmitter (2; 1) and a determining power adjustment information (TPC) as a function of this, and sending this information to the transmitter (2; 1) during successive timeslots(4), in order to control the transmission
10 power. In what is referred to as the slotted mode, the same power adjustment information (TPC) is transmitted to the transmitter (2; 1) in a number of successive timeslots (4) following a section (9) which is not filled with information.

(Figure 1)

1/2

FIG 1

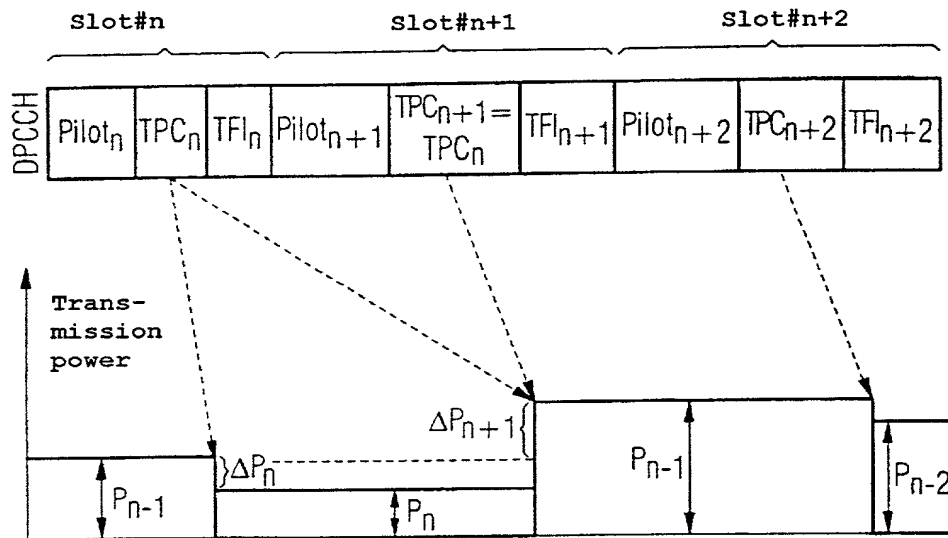


FIG 2

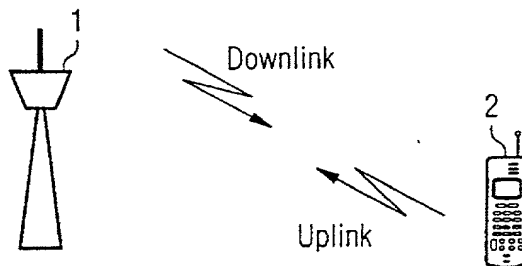


FIG 3


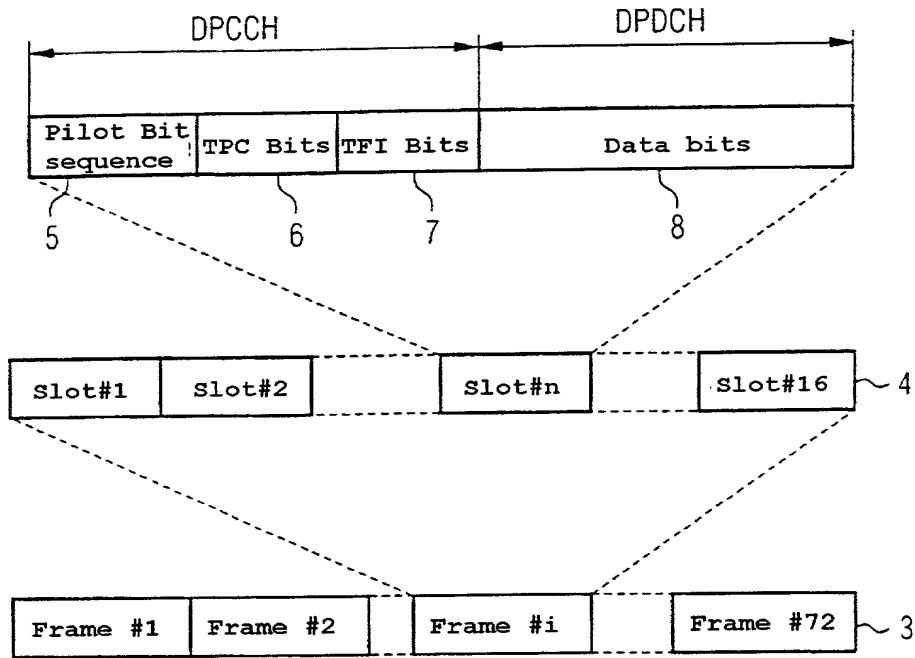


FIG 4

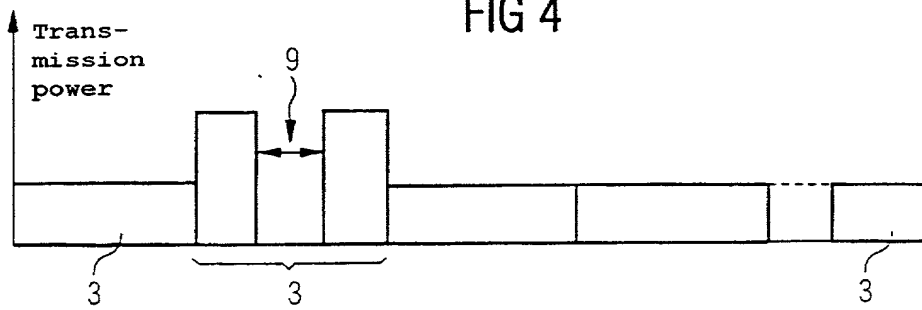

*

GR 99 P 2101

Description

Method for controlling the transmission power in a radio system, and a corresponding radio system

5

The present invention relates to a method as claimed in the precharacterizing clause of claim 1 for controlling the transmission power in a radio system, and to a corresponding radio system as claimed in the precharacterizing clause of claim 12, in particular to a corresponding mobile radio system.

Control of the transmission power represents an important performance feature in mobile radio systems, in order to suppress possible interference between the individual connections, and thus to make it possible to improve the capacity and quality of the connections, in order to be able to reduce the mean transmission power and to be able to match it as well as possible to the requirements, as well as to make it possible to compensate, at least partially, for losses in the transmission channels.

For this purpose, the signal transmitted by a transmitter is evaluated at the receiving end in the mobile radio system, in order to make it possible to this to produce information for power control and to transmit this to the transmitter, which then adjusts the transmission power in accordance with the power control or power adjustment information.

In this case, the power adjustment information is transmitted analogously to the transmission of the actual communication information, depending on the

respective mobile radio system, embedded in a predetermined frame and timeslot structure, that is to say the information is transmitted in a number of sequentially transmitted frames, with each frame having
5 a specific number of timeslots. For known mobile radio systems, it has been proposed for the transmitter of the mobile radio system to be operated in a mode which is referred to as the slotted mode or compressed mode, with the information to be transmitted in this case
10 being transmitted within specific frames in

compressed form to a receiver in order to make it possible, in the appropriate frame, to produce a section which is free of information bits, and which is referred to as an idle slot, which can then be used for
5 intermediate frequency measurements, for example in order to prepare for a handover between different mobile radio systems. The information must be transmitted in a shorter time interval, for compression.

10

The principle of compression is illustrated schematically in Figure 4, with a number of sequentially transmitted frames 3 being shown, each of which has an identical frame duration, for example
15 10 ms. The second frame 3 shown in Figure 4 uses the slotted mode, that is to say the information is transmitted in compressed form in this frame, so that an idle slot 9 occurs, in which now information is transmitted. As is likewise shown in Figure 4, the
20 transmission power can be increased during this frame 3 that is operated in the slotted mode, in order to achieve a transmission quality which is not adversely affected by the slotted mode.

25 However, the slotted mode interrupts the principle of fast power control. In modern mobile radio systems, power adjustment information for the transmitter is produced in each timeslot, so that the transmission power can be adapted relatively quickly. However, no
30 such power adjustment information can be transmitted during the idle slots described above. Firstly, this results in a higher error rate for the power adjustment information bits and, secondly, it must be expected

that the instantaneous transmission power will deviate to a greater extent from the nominal value.

In order to overcome this problem associated with the
5 slotted mode, it has been proposed, for example, to
temporally increase the energy in what are referred to
as pilot bits after the slotted mode,

for power control, in order to allow correct decoding of the power adjustment information, which is generally formed only by a corresponding bit with a specific mathematical sign. The pilot bits are used to estimate
5 the channel impulse response during what is referred to as a training sequence, and correspond to a known bit pattern. The power control procedure for the slotted mode as described in this document is, however, relatively complicated, and requires a relatively large
10 amount of effort.

The present invention is thus based on the object of proposing an improved method for controlling the transmission power in a radio system, and of proposing
15 a corresponding radio system, in which case the aim is to reliably control the transmission power in particular even in the slotted mode or compressed mode described above.

20 According to the invention, this object is achieved by a method having the features of claim 1, and by a radio system having the features of claim 12. The depending claims each define preferred embodiments of the present invention.

25 The invention proposes that the same power adjustment information be transmitted in successive timeslots, so that the transmission power in the transmitter can be set with greater reliability, by evaluating the power
30 adjustment information received during these timeslots in combination in order to adjust the transmission power.

The invention is particularly suitable for use in what is referred to as the slotted mode, in which case the same power adjustment information is transmitted a number of times following an idle slot, that is to say
5 a section of a frame in which no information is transmitted. However, the invention is not restricted to this use in the slotted mode, that is to say

the invention can in principle also be used for timeslots which do not follow an idle slot, in order to allow more reliable power control in these situations as well. In this case, this approach is of particular
5 interest when the transmission conditions in the respective transmission channel are not changing rapidly (for example when a mobile station is moving at slow speed).

10 In particular, the invention proposes that the signal-to-noise ratio of the received signal be evaluated, for example, after an idle slot, that appropriate power adjustment information be produced as a function of this, and that this information be transmitted to the
15 transmitter during the next two timeslots immediately following the idle slot. The transmitter then evaluates the power adjustment information received during these two timeslots and adjusts the transmission power taking account of both power adjustment information items, so
20 that a transmission power adjustment which may have been made on the basis of the first power adjustment information item can still be corrected.

The principle on which the present invention is based
25 can be used both in the uplink, that is to say for transmitting communication information from a mobile station to a base station, and in the downlink, that is to say for the opposite direction, or else for both directions at the same time.

30 After receiving the power adjustment information in the first timeslot immediately following the idle slot, the transmission power can initially be kept constant, so

that no change is made until the power adjustment information in the second timeslot has been received.

Generally, the power adjustment information transmitted
5 during each timeslot comprises only one bit, with the step width for changing the transmission power

being coded digitally. However, instead of this, the step width can also be coded in analogue form, that is to say the step width then depends, for example, directly analogously on the discrepancy between the received signal level measured in the receiver and a predetermined reference value.

The invention requires no change whatsoever to the specified timeslot format. The combination of the successively transmitted power adjustment information items results in an improvement in the available bit-signal-noise ratio (E_b/N_0). This increased bit-signal-noise ratio allows a greater step width to be provided for power control without any risk of an increased bit error rate more frequently resulting in the transmission power needing to be changed in the wrong direction.

The invention can be used in various types of radio system, although the present invention is of particular interest for mobile radio systems using code division multiplexing methods (code division multiple access CDMA).

The invention will be explained in more detail in the following text with reference to the drawing, based on preferred exemplary embodiments.

Figure 1 shows an illustration to explain the principle on which the invention is based, on the basis of a preferred exemplary embodiment,

Figure 2 shows a general schematic illustration to explain the information transmission in a mobile radio system,

- 5 Figure 3 shows the frame and timeslot structure for what is referred to as a downlink connection, according to the present standard of UMTS Standardization, and

Figure 3 shows the frame and timeslot structure for what is referred to as a downlink connection, according to the present standard of UMTS Standardization, and

Figure 4 shows an illustration to explain the frame structure in what is referred to as the slotted mode.

The principle of power control will first of all be explained in more detail with reference to Figure 2, with Figure 2 illustrating the communication between a base station 1 and a mobile station 2 in a mobile radio system. A connection from the base station 1 to the mobile part 2 is referred to as a downlink or forward link, while a connection from the mobile part 2 to the base station 1 is referred to as an uplink or reverse link. For downlink power control, the respective received signal is evaluated in the mobile station 2, and power adjustment information or power control information is produced as a function of it, and is sent back to the base station 1, so that the base station 1 can set the transmission power as appropriate. For uplink control, the received signal is evaluated in the base station 1, where the power control information is produced, and the mobile station 2 is instructed to carry out power adaptation.

The power control information is in this case transmitted embedded in a predetermined frame structure, depending on the respective mobile radio system.

As an example, Figure 3 shows the frame and timeslot structure for a downlink connection in a mobile radio system which is operated using a code division multiple access method (CDMA). The frame and timeslot structure shown in Figure 3 corresponds in particular to a UMTS mobile radio channel (Universal Mobile Telecommunications System), which is also referred to

as a DPCH (Dedicated Physical CHannel), in accordance with the current state of UMTS Standardization. UMTS is the designation for third-generation mobile radio systems, aiming to provide a worldwide, universal
5 mobile radio standard. According to the UMTS mobile radio standard, the multiple access method is what is referred to as the

WCDMA method (Wideband Code Division Multiple Access).

The frame structure shown in Figure 3 has a duration of 720 ms and comprises, in particular, 72 identically constructed frames 3 with a frame duration of 10 ms, with each frame in turn having 16 timeslots 4, each with a timeslot duration of 0.625 ms. Alternatively, a frame 3 may also comprise 15 correspondingly longer timeslots 4. However, the former situation is assumed in the following text. Each timeslot 4 comprises information which is split between a logical control channel (DPCCH, Dedicated Physical Control Channel) and a logical data channel (DPDCH, Dedicated Physical Data Channel). The DPCCH section comprises a pilot bit sequence 5 and what is referred to as a TPC information (Transmitter Power Control) 6 and TFI information (Transmitter Format Identifier) 7. The DPDCH section comprises user data bits 8.

The pilot bit sequence 5 is used for estimating the channel impulse response during what is referred to as a training sequence, and corresponds to a known bit pattern. The receiver can determine or estimate the channel impulse response of the mobile radio channel by comparing the received signal with the known pilot bit sequence.

The TFI information 7 is used for format identification for the respective receiver. The TFI bits are protected by means of their own coding method in accordance with the present WCDMA standard, and are distributed over an entire frame (time period 10 ms) by interleaving. If, for example, the TFI information 7 in each timeslot comprises two bits, then this results in a total of

$2 \times 16 = 32$ TFI bits per frame, which comprises 16 timeslots, and these are coded by means of what is referred to as a biorthogonal coding method.

- 5 The TPC information 6 represents the command, produced by the receiver and transmitted to the transmitter, to adjust the

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206

transmission power. For this purpose, the received power or the signal-to-noise ratio of the received signal is compared with a predetermined reference value in the receiver, and the value for the power adjustment command is determined as a function of the discrepancy. This means that, if the received power exceeds the reference value, a command is produced to reduce the transmission power, while a command to increase the transmission power is produced if the received power is less than the predetermined reference value. Thus, depending on the comparison result, the receiver thus transmits a digital or binary adjustment command to the transmitter. In this case, a command to increase the transmission power (power up command) is coded by a 1, while a command to reduce the transmission power (power down command) is coded by a zero. In each case, the adjustment command is transmitted to the transmitter after appropriate modulation. In accordance with the currently discussed WDCMA Standard for UMTS mobile radio systems, the transmission is carried out by means of QPSK modulation (Quadrature Phase Shift Keying), as a result of which the binary 1 or 0, respectively, is mapped onto the value -1 or +1, respectively, with subsequent spreading of the power control signal.

25

The power adjustment or power control information thus generally comprises only one bit, which indicates whether the transmission power should be increased or decreased at the transmission end. In order to allow this bit to be transmitted with a sufficiently low error probability, the bit is transmitted repeatedly within the TPC field 6. The TPC information shown in Figure 3 in consequence comprises, for example, the

three bits which are transmitted successively with identical information content.

However, despite the repeated transmission of the TPC
5 bits within the TPC field 6, the error rate is increased by the previously described slotted mode or compressed mode. In order to counteract this, before [lacuna]

information 6 to be transmitted repeatedly, with this being done especially during the two timeslots 4 which immediately follow the idle slot 9.

5 In order to explain this principle, Figure 1 shows, by way of example, the structure of the already previously mentioned DPCCH control channel (see Figure 3) in a frame, assuming that the timeslots #n shown in Figure 1, is the timeslot immediately following is an idle
10 slot, that is to say a section which is not filled with information. The profile of the transmission power, which is set in the transmitter as a function of the respectively transmitted TPC information, is shown underneath the timeslot structure.

15 In the receiver, the signal-to-noise ratio of the signal being received from the transmitter at that time is measured in order to determine the TPC or power adjustment information to be transmitted during the
20 timeslot #n, is compared with a reference value and is used to produce the TPC information TPC_n . This TPC information is transmitted to the transmitter during the timeslot #n, where it is decoded and used to adjust the transmission power. In this case, it is possible to
25 wait first of all in the transmitter for reception of the TPC information TPC_{n+1} transmitted during the next timeslot #n+1, before finally setting the transmission power to the desired value, so that it is recommended that the transmission power initially be set in the
30 transmitter in accordance with a "normal" nominal step width, which corresponds to a normal E_b/N_0 ratio, after receiving the TPC information TPC_n . This step width is indicated by ΔP_n in Figure 1, and corresponds to the difference between the instantaneous

transmission power P_{n-1} and the transmission power P_n set after reception of the TPC information TPC_n . The value 0 may also be chosen as the step width ΔP_n after reception of the power adjustment information TPC_n , in
5 order to keep the transmission power constant until the power adjustment information TPC_{n+1} is received, since it is then possible to make a decision

on the transmission power to be set, with greater reliability.

In order to produce the TPC information to be
5 transmitted during the next timeslot #n+1, the TPC
information from the previous timeslot is simply
repeated, that is to say $TPC_{n+1} = TPC_n$, rather than
evaluating the signal-to-noise ratio of the
transmission signal once again. In this way, the ratio
10 E_b/N_0 can be increased since, after receiving the
timeslot #n+1, the TPC information TPC_{n+1} can be
combined with the already previously received TPC
information TPC_n , and the transmitter is thus able to
set the transmission power to the desired value with
15 greater reliability. If, for example, the transmitter
identifies the fact that the decision made as a
consequence of the most recently received TPC
information was incorrect, this can now be corrected.
As shown in Figure 1, the transmitter can now also
20 change the transmission power with a larger step width,
thus reducing the risk of a further deterioration being
caused after an incorrect TPC decision. This is
indicated in Figure 1 by ΔP_{n+1} , with both ΔP_n and ΔP_{n+1}
indicating the step width with respect to the
25 transmission power P_{n-1} set after the idle slot.

The principle, mentioned above, of repeated
transmission of the same TPC information during
successive timeslots can be applied not only to the
30 first time after an interruption in the power control
by the idle slot, but also during a normal connection.
In this case, this is of particular interest for those
situations in which the transmission channel does not
change so fast with time, since the disadvantage,

associated with the method, of an increased delay in the power control can then be more than compensated for by the advantage of better quality of the transmitted power adjustment information. Since the smallest step
5 width for power control is currently 1 dB and, for implementation reasons, smaller

values are not suitable for use in mobile stations, this provides a possible way to reduce the power control rate.

5 Furthermore, the invention can be used to transmit the power adjustment information with a smaller number of TPC bits. Although this reduces the bit-signal-noise ratio (E_b/N_0), this can be compensated for, however, by the advantage of the invention, namely by increased
10 transmission reliability. The use of a small number of TPC bits is advantageous to the extent that this reduces what is referred to as the overhead, and the efficiency can thus be improved.

15 Furthermore, the present invention can also advantageously be used for what is referred to as a soft handover. In this case, the mobile station 2 transmits and receives data from and to a number of base stations 1. To detect the user data, the received
20 signals from all the connections are combined, thus allowing the power of each individual connection to be reduced. The TPC power adjustment commands may, however, in general not be combined, since the TPC power adjustment commands sent from different base
25 stations 1 (via a downlink) need not be identical. Since the TPC power adjustment commands must also be evaluated very quickly, it is also generally impossible to combine them in the uplink. Otherwise, intolerable delays would occur, caused by the corresponding
30 information being passed on from one base station 1 to another base station 1. In addition to increasing the power level of the number of TPC bits, this could be overcome by use of the present invention.

Finally, the previously described invention can also be combined with the principle of analogue transmission of the step width for adjustment of the transmission power. In this case, the transmission power to be set

5 in the transmitter and the

corresponding step width are coded in analogue form rather than digitally, that is to say the power adjustment information is in each case set in analogue form depending on the discrepancy between the measured
5 received signal level and the predetermined reference value, for example the pilot bit reception level. A discrepancy that is twice as great between the received signal level and the reference value thus results in a step width which is twice as large.

Patent Claims

1. A method for controlling the transmission power in a radio system,
5 with information being transmitted, embedded in a frame and a timeslot structure (3, 4), between a transmitter (2; 1) and a receiver (1; 2), with a signal, which is received by the receiver (1; 2) via a transmission channel in the radio system, from
10 the transmitter (2; 1) being evaluated and power adjustment information (6) being produced as a function of this in each timeslot (4) and being sent to the transmitter (2; 1), and with the transmission power in the transmitter (2; 1)
15 being adjusted as a function of the power adjustment information (6), characterized in that identical power adjustment information (6) is transmitted from the receiver (1; 2) to the transmitter
20 (2; 1) in a number of successive timeslots (4).
2. The method as claimed in claim 1, with the information being transmitted in compressed form in a specific frame (3), so that there is a
25 section (9) which is not filled with information within this frame (3), characterized in that, following a section (9) of a frame (3) which is not filled with information, the receiver (1; 2)
30 transmits identical power adjustment information (6) to the transmitter (2; 1) in a number of successive timeslots (4).

3. The method as claimed in claim 2,
characterized
in that, following the section (9) which is not filled
with information, the receiver (1; 2) transmits
5 identical power adjustment information (6) to the
transmitter (2; 1) in two successive timeslots (4).

4. The method as claimed in claim 3,
characterized

in that the transmission power in the transmitter (2;
1) is adjusted as a function of both power adjustment
5 information (6) received in the first timeslot (4)
following the section which is not filled with
information, and power adjustment information (6) which
is received in the second section (9) following the
section (9) which is not filled with information.

10

5. The method as claimed in claim 3 or 4,
characterized

in that the signal received by the receiver (1; 2) from
the transmitter (2; 1) is evaluated once again only
15 after the transmission of the identical power
adjustment information (6) in the first and second
timeslots (4) following the section (9) which is not
filled with information, and new power adjustment
information is produced as a function of this, and is
20 sent to the transmitter (2; 1) in the next timeslot
(4).

6. The method as claimed in one of claims 3-5,
characterized

25 in that the transmission power in the transmitter (2;
1) is changed by a fixed amount (ΔP_n) after receiving
the power adjustment information transmitted in the
first timeslot (4) following the section (9) which is
not filled with information, and in that, after
30 receiving the power adjustment information (6)
transmitted during the second timeslot (4) following
the section (9) which is not filled with information,
and taking account of the power adjustment information
(6) transmitted during the first timeslot (4) following

the section (9) which is not filled with information, a power change value (ΔP_{n+1}) is determined, and the transmission power in the transmitter (2; 1) is changed in accordance with this power change value (ΔP_{n+1}) relative to the transmission power (P_{n-1}) set prior to the first change.

7. The method as claimed in claim 6,
characterized
in that the fixed magnitude (ΔP_n) corresponds to the
value zero.

5

8. The method as claimed in one of the preceding
claims,
characterized

in that, in the receiver (1; 2), the power adjustment
10 information (6) is produced analogously as a function
of the discrepancy between a specific evaluated
parameter in the received signal and a corresponding
reference value.

15 9. The method as claimed in one of the claims 2-8,
characterized
in that identical power adjustment information (6) is
also transmitted to the transmitter (2; 1) in a number
of successive timeslots (4) which do not immediately
20 follow the section (9) which is not filled with
information, and
in that the transmission power in the transmitter (2;
1) is adjusted taking account of the power adjustment
information received during these timeslots (4).

25

10. The method as claimed in one of claims 2-9,
characterized
in that identical power adjustment information (6) is
transmitted to the transmitter (2; 1) a number of times
30 in successive timeslots (4) following a section (9)
which is not filled with information, with the number
of repetitions being different on each occasion.

11. The method as claimed in one of the preceding claims,

characterized

in that the method is used during a soft handover in

5 the mobile radio system.

12. A radio system,
having a transmitter (2; 1), and
having a receiver (1; 2) for receiving a signal, which
is transmitted via a transmission channel in the radio
5 system, from the transmitter (2; 1), and for evaluating
the received signal in order to produce power
adjustment information (6) as a function of it, and to
send this information (6) to the transmitter (2; 1),
with the transmitter (2; 1) being designed such that it
10 adjusts the transmission power as a function of the
power adjustment information from the receiver (1; 2),
with information being transmitted, embedded in a frame
and a timeslot structure (3, 4), between the
transmitter (2; 1) and the receiver (1; 2), with a
15 signal,
characterized
in that the receiver (1; 2) is designed such that it
transmits identical power adjustment information (6) to
the transmitter (2; 1) in a number of successive
20 timeslots (4).

13. The radio system as claimed in claim 12,
with the information being transmitted in compressed
form in a specific frame (3), so that there is a
25 section (9) which is not filled with information within
this frame (3),
characterized
in that the receiver (1; 2) is designed such that it
transmits identical power information (6) to the

transmitter (2; 1) in a number of successive timeslots (4) following a section (9) which is not filled with information in a frame (3).

- 5 14. The radio systems claimed in claim 13, characterized in that the receiver (1; 2) is designed such that it transmits identical power adjustment information (6) to the transmitter (2; 1) in two

successive timeslots (4) following the section (9) which is not filled with information.

15. The radio system as claimed in claim 14,
5 characterized
in that the transmitter (2; 1) is designed such that it adjusts the transmission power as a function of both power adjustment information (6) received in the first
10 timeslot (4) following the section which is not filled with information, and power adjustment information (6) which is received in the second section (9) following the section (9) which is not filled with information.

16. The radio system as claimed in claim 14 or 15,
15 characterized
in that the receiver (1; 2) is designed such that it once again evaluates the signal, received by the receiver (1; 2) from the transmitter (2; 1) after the transmission of the identical power adjustment
20 information (6) in the first and second timeslots (4) following the section (9) which is not filled with information, and produces new power adjustment information as a function of this, and sends this information to the transmitter (2; 1) in the next
25 timeslot (4).

17. The radio system as claimed in one of claims 13-16,
characterized
30 in that the transmitter (2; 1) is designed such that it changes the transmission power by a fixed amount (ΔP_n) after receiving the power adjustment information transmitted in the first timeslot (4) following the section (9) which is not filled with information and,

after receiving the power adjustment information (6)
received during the second timeslot (4) following the
section (9) which is not filled with information, and,
5 additionally taking account of the power adjustment
information (6) received during the first timeslot (4)
following the section (9) which is not filled with
information, it determines a power change value (ΔP_{n+1}),
and changes the

transmission power in the transmitter (2; 1) in accordance with this power change value (ΔP_{n+1}).

18. The radio system as claimed in claim 17,

5 characterized

in that the fixed amount (ΔP_n) corresponds to the value zero, so that after receiving the power adjustment information transmitted in the first timeslot (4) following the section (9) which is not filled with
10 information, the transmitter (2; 1) keeps the transmission power constant until reception of the power adjustment information (6) transmitted in the second timeslot (4) following the section (9) which is not filled with information.

15

19. The radio system as claimed in one of claims 12-18,

characterized

in that the receiver (1; 2) is designed such that it
20 produces the power adjustment information (6) analogously as a function of the discrepancy between a specific evaluated parameter in the received signal and a corresponding reference value.

25 20. The radio system as claimed in one of claims 13-19,

characterized

in that the receiver (1; 2) is designed such that it also transmits identical power adjustment information
30 (6) to the transmitter (2; 1) in a number of successive timeslots (4) which do not directly follow a section (9) which is not filled with information, and

in that the transmitter (2; 1) is designed such that it adjusts the transmission power taking account of the power adjustment information received during these timeslots (4).

5

21. The radio system as claimed in one of claims 12-20,

characterized

in that the radio system is a CDMA mobile radio system.

FIG 1


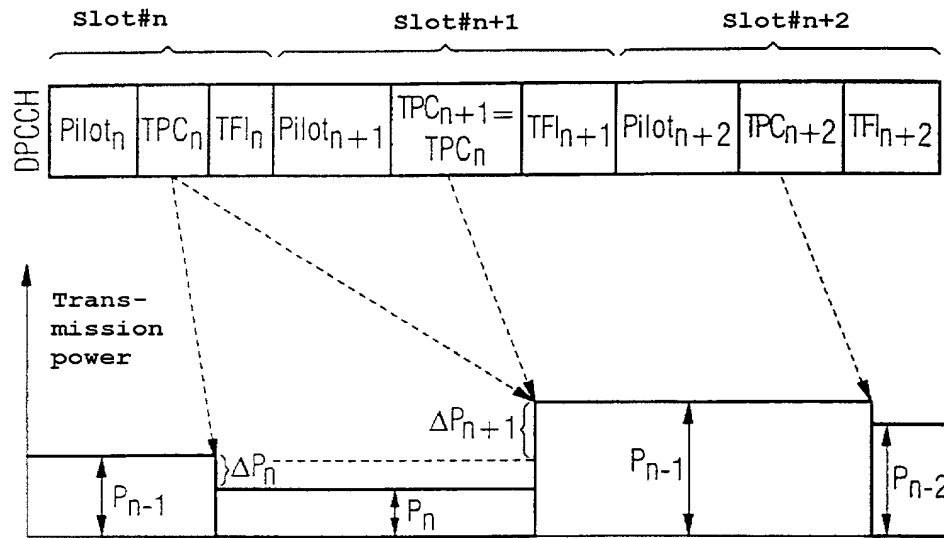


FIG 2

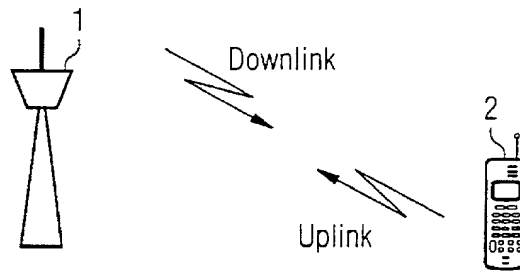

2/2

FIG 3


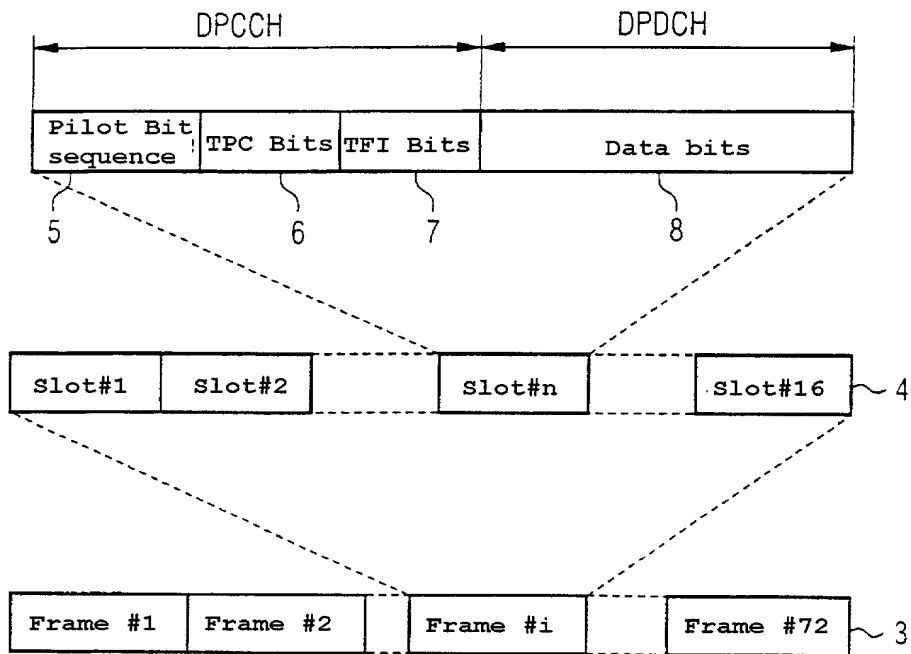


FIG 4

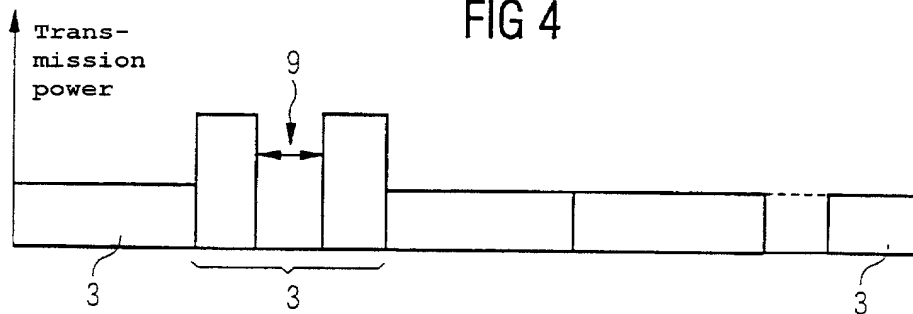

Declaration and Power of Attorney For Patent Application

Erklärung Für Patentanmeldungen Mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Verfahren zur Regelung der
Sendeleistung in einem Funksystem und
entsprechendes Funksystem

Method for adjusting transmission power
in a radio system and corresponding
radio system

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)

☐ hier beigefügt ist.

☒ am 16.05.2000 als

PCT internationale Anmeldung

PCT Anwendungsnummer PCT/DE00/01542

eingereicht wurde und am _____

abgeändert wurde (falls tatsächlich abgeändert).

(check one)

☐ is attached hereto.

☒ was filed on 16.05.2000 as

PCT international application

PCT Application No. PCT/DE00/01542

and was amended on _____
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

Prior foreign applications
Priorität beansprucht

Priority Claimed

19928763.5 DE
(Number) (Country)
(Nummer) (Land)

23.06.1999
(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☒ ☐
Yes No
Ja Nein

(Number) (Country)
(Nummer) (Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐ ☐
Yes No
Ja Nein

(Number) (Country)
(Nummer) (Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐ ☐
Yes No
Ja Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/01542
(Application Serial No.)
(Anmeldeseriennummer)

16.05.2000
(Filing Date D, M, Y)
(Anmeldedatum T, M, J)

anhängig
(Status)
(patentiert, anhängig,
aufgegeben)

pending
(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date D, M, Y)
(Anmeldedatum T, M, J)

(Status)
(patentiert, anhängig,
aufgeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Customer No. 29177



and I hereby appoint

29177

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

Ext. _____

Postanschrift:

Send Correspondence to:

Bell, Boyd & Lloyd LLC
Three First National Plaza, 70 West Madison Street, Suite 3300 60602-4207 Chicago, Illinois
Telephone: (001) 312 372 11 21 and Facsimile (001) 312 372 20 98

or

Customer No. 29177

Voller Name des einzigen oder ursprünglichen Erfinders: BERNHARD RAAF		Full name of sole or first inventor: BERNHARD RAAF	
Unterschrift des Erfinders <i>Bernhard RAAF</i>	Datum 8.11.01	Inventor's signature	Date
Wohnsitz MUENCHEN, DEUTSCHLAND DEX		Residence MUENCHEN, GERMANY	
Staatsangehörigkeit DE		Citizenship DE	
Postanschrift MAXHOFSTR. 62		Post Office Address MAXHOFSTR. 62	
81475 MUENCHEN		81475 MUENCHEN	
Voller Name des zweiten Miterfinders (falls zutreffend):		Full name of second joint inventor, if any:	
Unterschrift des Erfinders	Datum	Second Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).